

OBR 1

OBSTRUCTION LIGHT LUMINAIRE



ORDERING DATA

Catalog no.	Lamps	Life (hrs)
OBR 1/SH-100GLS	GLS 100W	8,000
OBR 1/SH/PC/FD-100GLS*	GLS 100W	8,000
OBR 1/DH-100GLS	2XGLS 100W	8,000
OBR 1/DH/PC/FD/CD-100GLS**	2XGLS 100W	8,000

NOTE : SH = Single Head
DH = Double Heads

* Luminaire Completed with PC and FD

** Luminaire Completed with PC,FD and CD

ACCESSORIES(see page no.75)

PC = Photoelectric Control

FD = Flashing Device



CD = Change-Over Device

APPLICATIONS

- Obstruction Markers for Air Navigation
- Industrial Signaling Applications

SPECIFICATION FEATURES

- Die Cast Aluminium Housing Finished in Black Color Polyester Powder Coat
- Red Globe Made of UV-Resistant Acrylic
- High Quality Aluminium Reflector
- Brass Threshold is Suitable for 3/4" Pipe
- Die Cast Aluminium Junction Box
- Weatherproof and Durable Silicone Rubber Gasket
- Stainless Steel Screws
- Available in Single and Double Heads
- IP 65, Class I

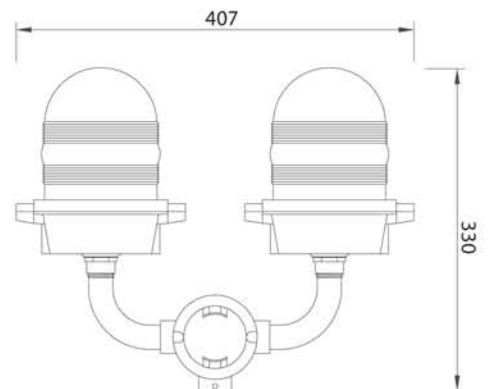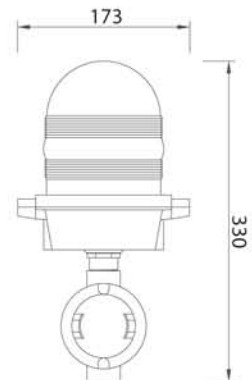

Wiring Diagram

